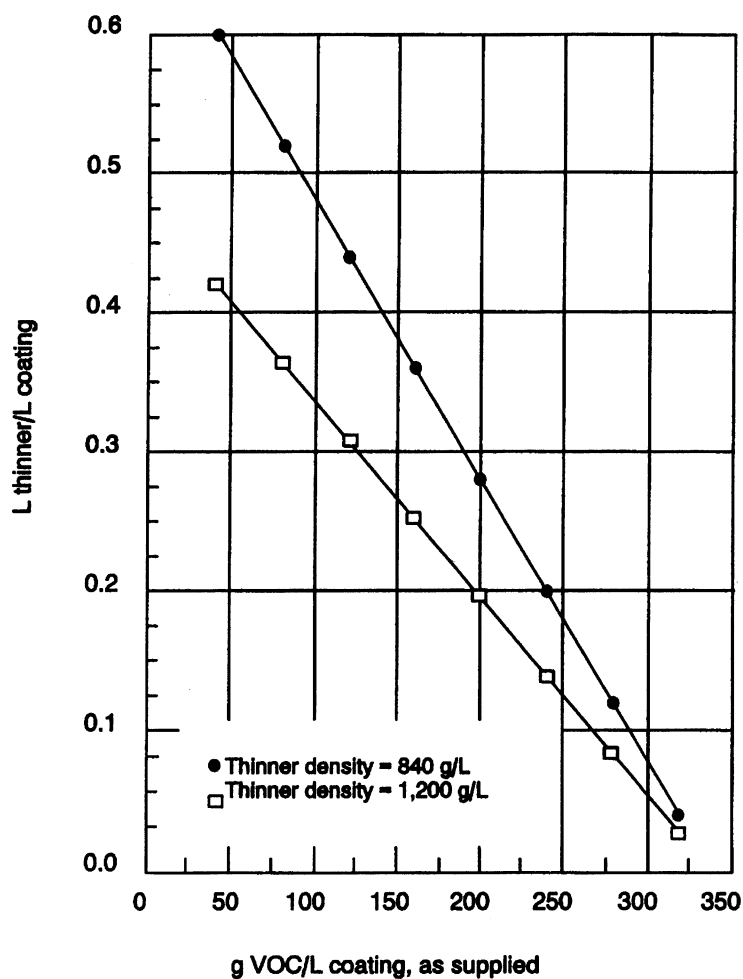


APPENDIX B TO SUBPART II TO PART 63—MAXIMUM ALLOWABLE THINNING RATES AS
A FUNCTION OF AS SUPPLIED VOC CONTENT AND THINNER DENSITYAppendix B To Subpart II of Part 63 -- Maximum Allowable Thinning Rates As A
Function Of As Supplied VOC Content And Thinner Density^{a,b}

^a These graphs represent maximum allowable thinning ratios for general use coatings without water or exempt compounds.

^b The average density of the volatiles in the coating was assumed = 840 g solvent/L solvent.